




<b>Product</b> <b>Item number</b>	CareSystem support arm with spring height adjustable RF148000
<b>Colour</b>	White
<b>Product description</b>	 <p>Support arm with counter spring, 850 mm, height adjustable 250 mm.  Excl. mounting kit.  Discontinued as per 31 Dec 2015</p> <p>Support arm with counter spring, 850 mm, height adjustable 250 mm.  Excl. mounting kit.  Discontinued as per 31 Dec 2015</p>
<b>Adjustability</b>	Height adjustable
<b>Product capacity</b>	Max. vertical load: 135 kg.
<b>Materials</b>	<p>Basic material: 20 micrometre anodized aluminium</p> <p>Surface material: Two-component plastic (PVC)</p> <p>End cap: Arnite</p> <p>Front plate/end covers, track: Polystyrene plastic (PS)</p>
<b>Ergonomy</b>	<p>The oval shape gives an easy and comfortable surface to lean and push against.</p> <p>The end of the support arm is enlarged so that it is easier to pull forward from a sitting position and also provides a clear sense of where the support arm ends.</p> <p>The surface material is soft and slip-resistant, and has a warm feel.</p>

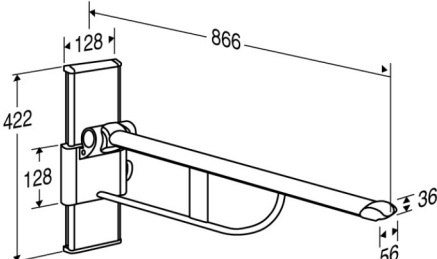

# PRESSALIT®

<b>Product</b>	CareSystem support arm with spring height adjustable
<b>Item number</b>	RF148000
<b>Features</b>	<p>The spring ensures that the support does not "fall" down from its vertical position, and it makes raising easier. A counterbalanced support arm can be raised and lowered with a sliding movement or in easy stages. Folds against the wall.</p> <p>Height adjustable 250 mm.</p> <p>The underside is shaped for the mounting of various accessories.</p>
<b>Cleaning</b>	<p>Pressalit recommends that chalky deposits be removed from wall tracks and other aluminum parts using a solution of three parts of 30% acetic acid to seven parts tap water. When the aluminum parts have been washed down with this solution, the parts should be wiped over with a damp cloth wrung out in clear water.</p>

[pressalit.com](http://pressalit.com)

# PRESSALIT®